

4 K Reproductor el S812 Amlogic primer Quad Core Smart TV Box totalmente decodificar H264 y 265 TM8S



Hardware Especificaciones

Modelo no.	TM8S
CPU	Amlogic S812 Quad Core Cortex-A9r4 2.0GHz
GPU	Octo-Core Mali™ -450MP GPU
FLASH	NAND DE 8GB FLASH

Fuente de alimentación Especificaciones

Energía De la fuente	DC 5V/2A
Energía Indicador (LED)	Energía EN : azul; Espera: rojo

Características principales

OS	Google Android™ 4.4 KitKat
3D	3D-HD 1080Px2
Bluetooth™	Apoyo Bluetooth™ 4.0
Apoyo Formato de decodificador	HD MPEG1/2/4,H.264/H.265, HD AVC y VC-1, RM/RMVB, Xvid/DivX3/4/5/6 , RealVideo8/9/10
Apoyo Formato de los medios	AVI/Rm/Rmvb/Ts/Vob/Mkv/Mov/ISO/Wmv/Asf/Flv/Dat/Mpg/Mpeg
Apoyo Formato de la música	MP3/WMA/AAC/WAV/OGG/AC3/DDP/TrueHD/DTS/DTS/HD/FLAC/APE
Apoyo Formato de la foto	HD JPEG/BMP/GIF/PNG/TIFF
Anfitrión del USB	2 alto Velocidad USB 2.0, soporte U DISK y USB HDD
Tarjeta Lector	SD/SDHC/MMC Tarjetas
Archivo de disco DURO	FAT16/FAT32/NTFS
Sistema de	
Apoyo Subtítulos	SRT/SMI/SUB/SSA/IDX + USB
Alta Salida de vídeo de definición	Apoyo Todos los estándar SD/HD/4K2K Ultra HD decodificación y salida de
Tipo OSD de las lenguas	Inglés/Francés/Alemán/Español/Italiano etc idiomas Multilateral
LAN	Ethernet: 10 / 100M, RJ-45 estándar
Wireless	Apoyo Doble banda de Wi-Fi™ (2,4 GHz/5 GHz) (AP6330)
Ratón o el teclado	Apoyo Ratón y teclado por USB; Apoyo 2,4 GHz Vireless ratón y teclado a través de Dongle del USB de 2,4 GHz
HDMI™	HDMI™ 1.4B
SISTEMA DE PESOS AMERICANO	Apoyo
Óptica	Apoyo
3G	Apoyo
SPDIF/IEC958	Óptica
IPTV y OTT	Apoyo Muchas clases de IPTV y OTT programas

Software Especificaciones

Red Función	Miracast, XBMC, Airplay, Skype Chat, Picasa, Youtube, Flickr, Facebook, Películas Online, etc.
Otros Característica	Gratis Buscando en Internet, miles de aplicaciones de Android, muchos tipos de juegos, etc.

Características:

4 K Media Player es un innovador centro multimedia con un Android basado en sistema operativo que te permite jugar y ver el contenido sin tener que pagar por cable o cualquier suscripciones mensuales. Sólo conéctelo y descubrir todo un mundo de TV en vivo, TV shows, eventos deportivos, fotos, música y más.

¿Qué es la caja?

Reproductor de 1 * 4K

1 * Cable HDMI

1 * Control remoto


1 * adaptador de corriente

1 * Manual de usuario



Picture Show



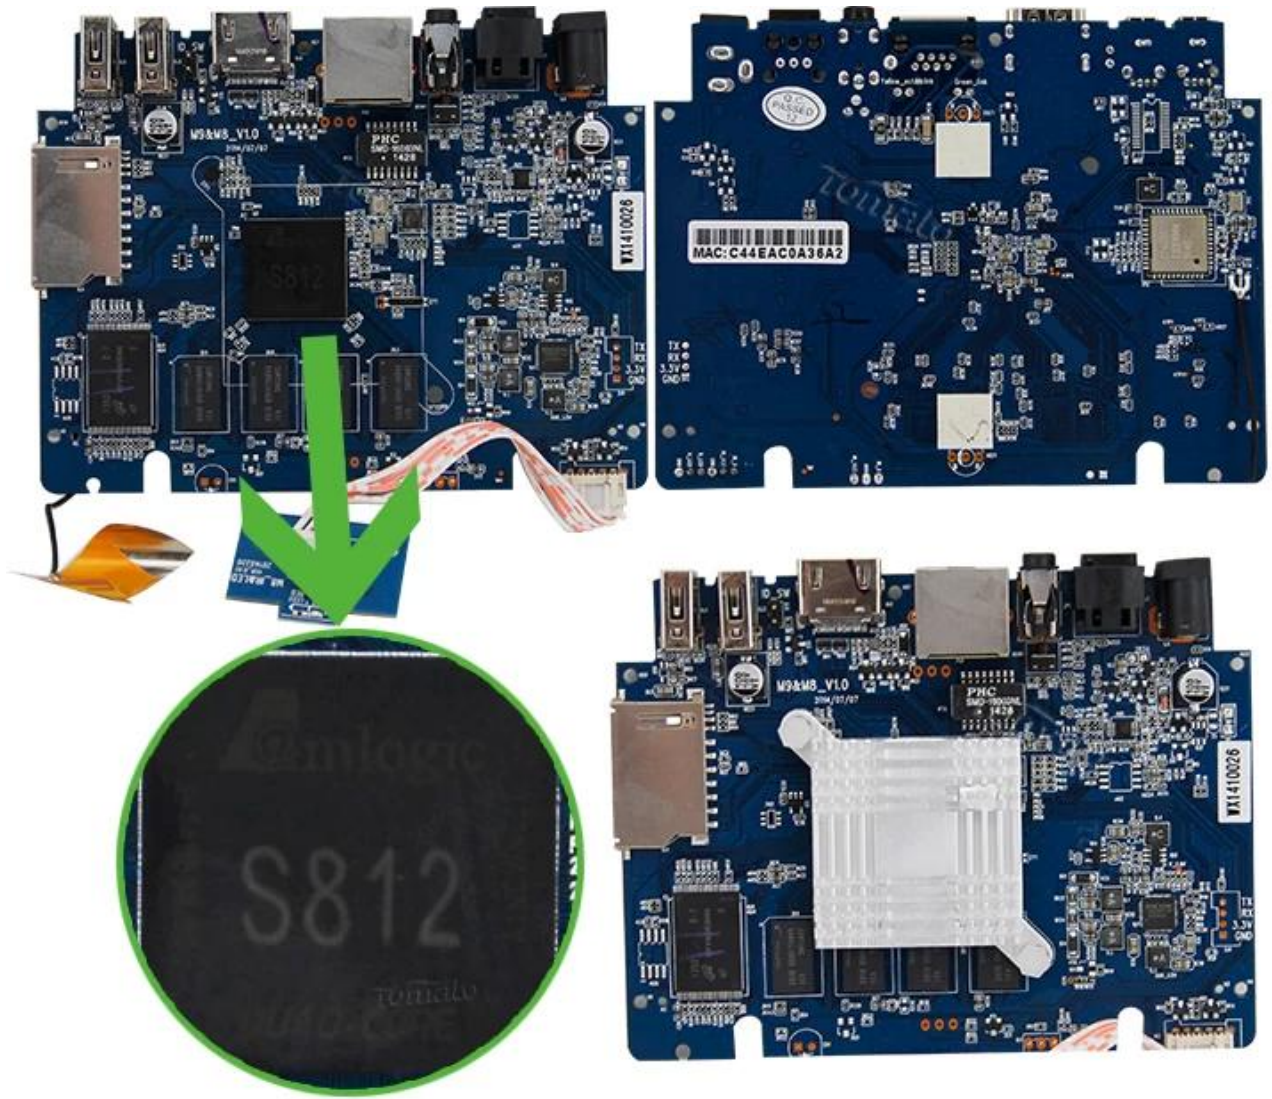



06:18 Friday, Nov 7

Online Video My recommend Settings

My Apps Music Local

4K Home Play Store App Drawer Plus Mouse

SETTINGS

Network Display Advanced Other

Model number :
M8S

Android version :
4.4.2

Build number :
KOT49H.20141103 test-keys

System Update

More Settings

Kernel version :
3.10.33
shaoshuai.cen@wyst #2
Mon Nov 3 11:40:41 CST 2014

SETTINGS

Network Display Advanced Other

Miracast OFF

Remote Control OFF

Google TV Remote OFF

CEC Control

Output Modes

- 4k2k-25hz
- 4k2k-30hz
- 4k2k-smpte

Audio format to be transmitted

Screen

PCM OFF



Confluence

Summary information

Summary Free memory: 937MB
 IP address: 192.168.1.195

Storage Screen resolution: 1920x1080@60.00Hz - Full screen (30.51 fps)

Network Operating system: Linux 3.10.33 #2 SMP PREEMPT Mon Nov 3 11:40:41 CST 201...
 System uptime: 0 Minutes

Video Total uptime: 0 Minutes

Hardware Battery level: 100%

PVR service

XBMC 13.2 Git:20140821-c5ae8b3 (Compiled: Sep 23 2014)

CPU Usage: CPU0: 28.6% CPU3: 31.2%

CPU-Z SOC SYSTEM BATTERY SENSORS

Cortex ARM Cortex-A9
 Intelligent Processors by ARM[®]
 1.99 GHz

CPU Architecture	ARM Cortex-A9
Cores	4
Revision	r4p1
Clock Speed	24 MHz - 1.99 GHz
Core 0	648 MHz
Core 1	stopped
Core 2	stopped
Core 3	984 MHz
CPU Load	33 %
GPU Vendor	ARM
GPU Renderer	Mali-450 MP

CPU-Z SOC SYSTEM BATTERY SENSORS ABOUT

Model	M8S (n200)
Manufacturer	MBX
Board	n200
Display	KOT49H.20141103 test-keys
Hardware	amlogic
Android Version	4.4.2
Kernel Architecture	armv7l
Kernel Version	3.10.33 (20141103)
Screen Resolution	1920 x 1008
Screen Density	240 dpi
Total RAM	1606 MB
Available RAM	984 MB (61%)
Internal Storage	5.33 GB
Available Storage	4.99 GB (93%)
Root Access	Yes

Root Checker

Device: M8S

Android: 4.4.2 | API: 19

Check Now

Status: Rooted
Id: uid=0(root) gid=0(root)
Superuser: Not found
Busybox: /system/xbin/busybox
Su Location: /system/xbin/su
Sudo Location: Not found
Environment Vars.:
/sbin/
/vendor/bin/
/system/sbin/
/system/bin/
/system/xbin/



Wifi Analyzer

VIEW SETTINGS

Tomato (50:bd:5f:2e:9b:d4)



WPA2

ChinaNet-iabK (34:cd:be:8a:7c:34)

Connected to:
Tomato
50:bd:5f:2e:9b:d4
IP address: 192.168.1.195
Gateway: 192.168.1.1
Netmask: 255.255.255.0
DNS1: 202.96.128.86
DNS2: 202.96.134.33
Server IP: 192.168.1.1

Tomato	Connected
ChinaNet-iabK	Secured with WPA/WPA2 (WPS available)
HiWiFi_012	Secured with WPA/WPA2
ChinaNet-b	Secured with WPA/WPA2
ChinaNet-c	Secured with WPA/WPA2
82583300	Secured with WPA/WPA2

Tomato

Status	Connected
Signal strength	Excellent
Link speed	65Mbps
Security	WPA/WPA2 PSK
IP address	192.168.1.195

Cancel Forget

WPA



About MediaBox

System updates

Status
Status of network and other information

Legal information

Model number
M8S

Android version
4.4.2

Kernel version
3.10.33
shaoshuai.cen@wyst #2
Mon Nov 3 11:40:41 CST 2014

Build number
KOT49H.20141103 test-keys

Ethernet Infor
IP address,DNS,MAC address,etc.

Apps

DOWNLOADED RUNNING

	Settings 1 process and 0 services	21MB
	SettingsMbox 1 process and 1 service	26MB 04:23
	PPPoE 1 process and 1 service	3.4MB 04:03
	Google Play services 1 process and 3 services	15MB 02:37
	Google Play services 1 process and 2 services	12MB 04:24
	Google Play Store 1 process and 1 service	7.9MB 04:19

Storage

INTERNAL STORAGE

Total space
5.33GB

Available
4.98GB

Apps (app data & media content)
347MB

Pictures, videos
20.00KB

Cached data
68.97MB

Misc.
1.72MB

SD CARD

Mount SD card
Insert an SD card for mounting

