

Google TV Box prend en charge 4K2K 1 Go de RAM 8 Go de ROM Android 4.4 Mini PC TM8C



Spécifications matérielles

Numéro de modèle.	TM8C
CPU	Amlogic S812 Quad Core Cortex-A9r4 2,0 GHz
GPU	GPU Octo-Core Mali™-450MP
ÉCLAIR	FLASH NAND 8 Go
SDRAM	1 Go DDR3

Spécifications de l'alimentation

Source de courant	C.C 5V/2A
Indicateur d'alimentation (LED)	Pouvoir ON :bleu; Veille : Rouge

Caractéristiques principales

Système d'exploitation	Google Android™ 4.4 KitKat
3D	3D-HD 1080Px2
Bluetooth™	Prise en charge du Bluetooth™ 4.0
Format de décodeur pris en charge	HD0MPEG1/2/4,H.264/H.265, HD UN VC/VC-1, RM/RMVB, Xvid/DivX3/4/5/6, RealVideo8/9/10
Format multimédia pris en charge	Avi/Rm/Rmvp/Ts/Vob/Mkv/Mov/ISO/Wmv/Asf/Flv/Dat/Mpg/Mpeg
Format de musique pris en charge	MP3/WMA/AAC/WAV/OGG/AC3/DDP/TrueHD/DTS/DTS/HD/FLAC/APE
Format de photo pris en charge	HDJPEG/BMP/GIF/PNG/TIFF
Emplacement USB	2 USB 2.0 haute vitesse, prend en charge le disque U et le disque dur USB
Lecteur de cartes	Cartes SD/SDHC/MMC
Système de fichiers du disque dur	FAT16/FAT32/NTFS
Sous-titre de soutien	SRT/SMI/SUB/SSA/IDXUSB
Sortie vidéo haute définition	Prend en charge tous les décodages et sorties SD/HD/4K2K Ultra HD standards.
Types de Réseau localgues OSD	Anglais/Français/Allemand/Espagnol/Italien, etc. Langues multilatérales
LAN	Ethernet : 10/100 M, norme RJ-45
Sans fil	Wi-Fi™ 2,4 GHz (Ap6210)
Souris/Clavier	Prise en charge de la souris et du clavier via USB ; prise en charge de la souris et du clavier sans fil 2,4 GHz via un dongle USB 2,4 GHz
HDMI™	HDMI™ 1.4B
AV	Soutien
Optique	Soutien

3G	Soutien
SPDIF/IEC958	Optique
IPTV et OTT	Prend en charge de nombreux types de programmes IPTV et OTT

Spécifications du logiciel

Fonction réseau	Miracast, XBMC, Airplay, Skype Chat, Picasa, Youtube, Flickr, Facebook, films en ligne, etc.
Autre fonctionnalité	Recherche Internet gratuite, des milliers d'applications Android, de nombreux types de jeux, etc.



Picture Show



SD Card Port

Indicator Light



USB*2

HDMI


ETHERNET

AV

OPTICAL





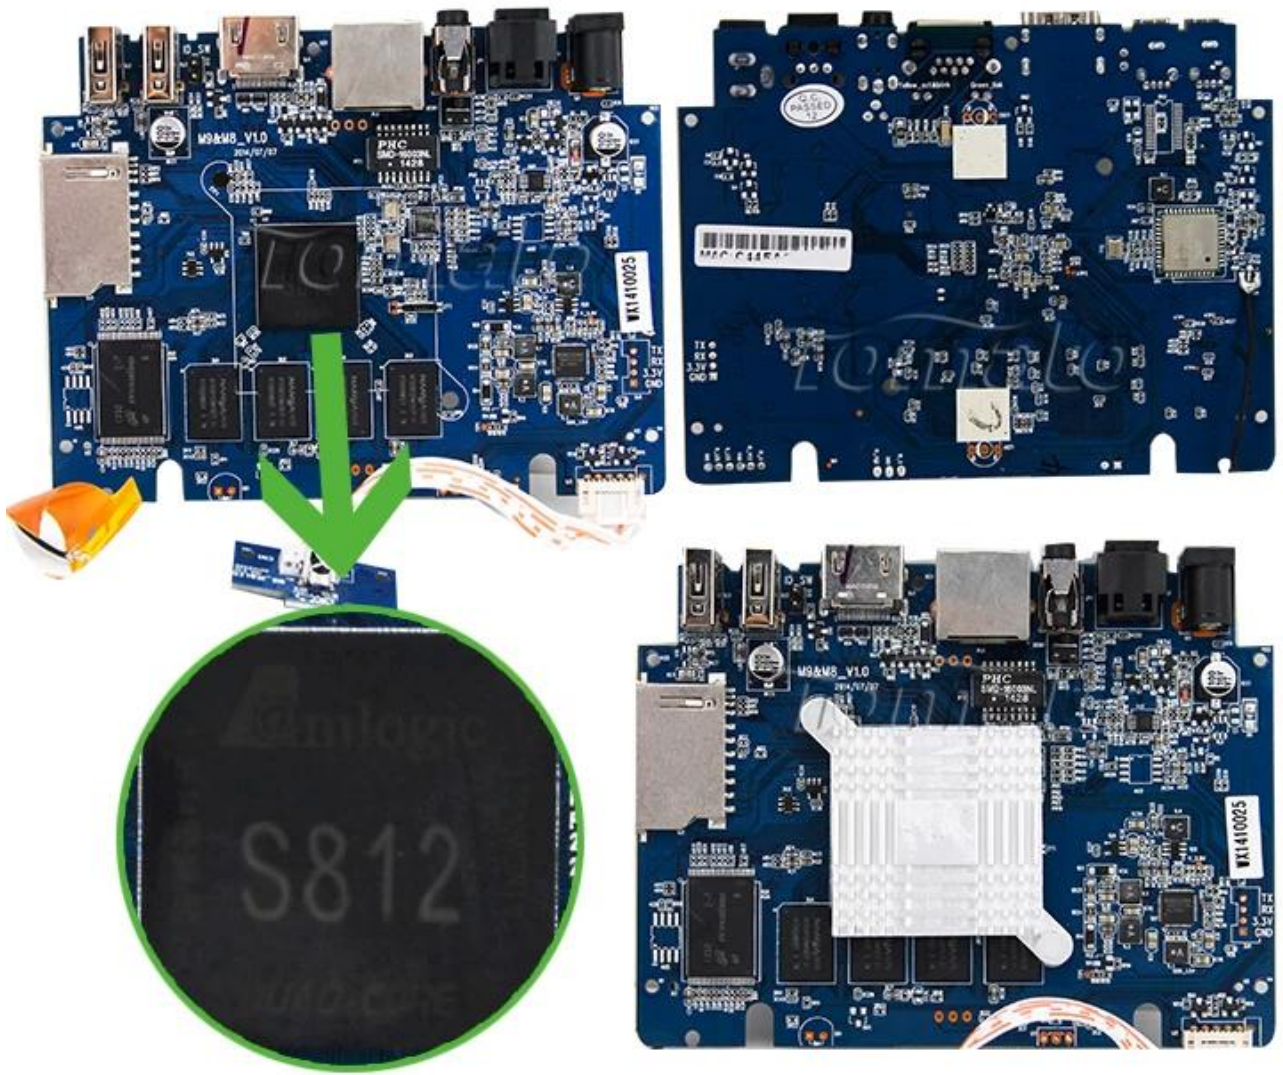







Power Port







05:44 Friday, Nov 7

 Online Video	 My recommend	 Settings			
 My Apps	 Music	 Local			
					

 My Apps

1/26

 AppInsta...	 Browser	 Calculator	 Clock	 Downloa...	 Email
 Facebook	 FileBrow...	 Gallery	 Google S...	 Media C...	 Miracast
 MoviePl...	 Music	 Netflix	 People	 Play Store	 PPPoE



SETTINGS

Network | Display | **Advanced** | Other

Output Modes

- HDMI auto OFF
- HDMI Output 4k2k-24hz
- Hide Status 4k2k-25hz
- Display Pos 4k2k-30hz
- Start screen saver Never 4min 8min 12min

SETTINGS

Network | **Display** | Advanced | Other

Miracast

Remote Control OFF

Google TV Remote OFF

CEC Control

Application request to change orientation

Keep landscape mode on home screen

Digital audio auto-detection OFF

Digital Audio Output PCM

Network | **Display** | Advanced | Other

Model number : M8C [System Update](#)

Android version : 4.4.2 [More Settings](#)

Build number : KOT49H.20141031 test-keys

Kernel version : 3.10.33 shaoshuai.cen@wyst #1 Thu Oct 30 16:56:56 CST 2014

Root Checker

Device: M8C
Android: 4.4.2 | API: 19

Check Now

Status: Rooted
Id: uid=0(root) gid=0(root)
Superuser: Not found
Busybox: /system/xbin/busybox
Su Location: /system/xbin/su
Sudo Location: Not found
Environment Vars.:
/sbin/
/vendor/bin/
/system/sbin/
/system/bin/
/system/xbin/

Wifi Analyzer

Tomato (50:bd:5f:2e:9b:d4)

CH 6 2437 MHz -42 dBm
WPA2

ChinaNet-iabK (34:cd:be:8a:7c:34)

- Tomato (Connected) HUAWEI TECHNOLOGIES CO., LTD
- ChinaNet-iabK (Secured with WPA/WPA2 (WPS available)) CISCO-LINKSYS
- yishuai161 (Secured with WPA/WPA2 (WPS available)) ZTE CORPORATION
- ChinaNet-9 (Secured with WPA/WPA2 (WPS available)) .INK TECHNOLOGIES CO., LTD
- 82583300 (Secured with WPA/WPA2 (WPS available))
- CMCC-AUTO (Secured with 802.1x)
- eLuoHu(free)
- CMCC

Connected to:
Tomato
50:bd:5f:2e:9b:d4
IP address: 192.168.1.193
Gateway: 192.168.1.1
Netmask: 255.255.255.0
DNS1: 202.96.128.86
DNS2: 202.96.134.33
Server IP: 192.168.1.1

Tomato

Status	Connected
Signal strength	Excellent
Link speed	65Mbps
Security	WPA/WPA2 PSK
IP address	192.168.1.193


Cancel Forget


Confluence
Tomato

Summary information

- Summary** Free memory: 119MB
IP address: 192.168.1.193
- Storage** Screen resolution: 1920x1080@60.00Hz - Full screen (30.01 fps)
- Network** Operating system: Busy
System uptime: Busy
- Video** Total uptime: Busy
- Hardware** Battery level: Busy
- PVR service**

XBMC 13.2 Git:20140821-c5ae8b3 (Compiled: Sep 23 2014)

CPU Usage: CPU0: 53.3% CPU1: 22.4% 

Memory Used: 80% 

SYSTEM BATTERY SENSORS ABOUT

Model	M8C (n200)
Manufacturer	MBX
Board	n200
Display	KOT49H.20141031 test-keys
Hardware	amlogic
Android Version	4.4.2
Kernel Architecture	armv7l
Kernel Version	3.10.33 (20141031)
Screen Resolution	1920 x 1008
Screen Density	240 dpi
Total RAM	590 MB
Available RAM	126 MB (21%)
Internal Storage	5.33 GB
Available Storage	4.99 GB (93%)
Root Access	Yes

Cortex ARM Cortex-A9
Intelligent Processors by ARM[®]
1.99 GHz

CPU Architecture	ARM Cortex-A9
Cores	4
Revision	r4p1
Clock Speed	24 MHz - 1.99 GHz
Core 0	1608 MHz
Core 1	stopped
Core 2	stopped
Core 3	stopped
CPU Load	6 %
GPU Vendor	ARM
GPU Renderer	Mali-450 MP



Storage Tomato 5:48

INTERNAL STORAGE

Total space	5.33GB
Available	4.98GB
Apps (app data & media content)	347MB
Pictures, videos	20.00KB
Cached data	68.92MB
Misc.	2.28MB

SD CARD

About MediaBox 5:48

System updates

Status
Status of network and other information

Legal information

Model number
M8C

Android version
4.4.2

Kernel version
3.10.33
shaoshuai.cen@wyst #1
Thu Oct 30 16:56:56 CST 2014

Build number
KOT49H.20141031 test-keys

Ethernet Infor
IP address,DNS,MAC address,etc.

Tomato