
## □ 3G/4G LTE WCDMA □□□□ Android □□□

ПП □ 3G/4G LTE WCDMA Android □□ Amlogic S905X3 □□ ARM Cortex-A55 □□ 2.0GHz ARM Mali-G31 16GB/32GB EMMC ПП 2GB/4GB DDR4 □□9.0/ATV 4.1 ∏∏∏ ПП Widevine □ Verimatrix/ Playready □□□ 4G LTE\_\_\_\_\_ ∏50Mbps MHZ-E B1/B3/B5/B7/B8/B20@FDD LTE∏ B1/B5/B8@WCDMA\\\850/900/1800/1900@GSM B2/B4/B8/B17@FDD LTE□  $MHZ-A \square \square \square$ B38/B39/B40/B41@TDD LTE[B1/B8@WCDMA[B34/39@TD-SCDMA[]900/1800@GSM B1/B3/B5/B8@FDD LTE\B38/B39/B40/B41@TDD MHZ-CE000/00/000000 LTENB1/B8@WCDMANB34/B39@TD-SCDMANBC0@CDMA20001X/EXDON 900/1800@GSM MHZ-E000000000/00/00/00 B1/B3/B5/B7/B8/B20@FDD LTE∏B38/B40/B41@TDD LTE∏ B1/B5/B8@WCDMA[] B3/B8@GSM B4/B13@FDD LTE MHZ-V(|||)B2/B4/B12@FDD LTE∏ B2/B4/B5@WCDMA  $MHZ-A(\sqcap\sqcap)$ B1/B2/B3/B4/B5/B6/B7/B8/B28@FDD LTE□ B40@TDD LTE□ MHZ-AU(0000/0000/000) B1/B2/B5/B8@WCDMA∏ B2/B3/B5/B8@GSM MHZ-J(||||)B1/B3/B8/B18/B19/B26@FDD LTE□ B41@TDD LTE□ B1/B6/B8/B19@WCDMA VP9/H.265/AVS2 □□ 4Kx2K@60fps□H.264 4K @30fps\\AVS/VC-1/MPEG1-4 1080P @60fps H.264/H.265 1080P @60fps  $\square\square MPEG1/2/4 \square H.265/HEVC \square AVS2 \square \square$ □AVC/VC-1□RM/RMVB□Xvid/DivX3/4/5/6□RealVideo8/9/10 Avi/Rm/Rmvb/Ts/Vob/Mkv/Mov/ISO/wmv/asf/flv/dat/mpg/mpeg MP3/WMA/AAC/WAV/OGG/DDP/TrueHD/HD/FLAC/APE □□ JPEG/BMP/GIF/PNG/TIFF HDR 10 **HDMI** HDMI 2.1 [] 3D[]HDR[]CEC [] 4Kx2K@60fps [][][][] ПП **USB** 1\*USB 2.0, 1\*USB 3.0 [ USB [ U **RI45** 10/100M∏RJ-45∏∏ Miracast\DLNA\Airplay\Skype\Netflix\Twitter\Picasa\Youtube\Flicker\ WiFi  $11ac \square \square 4.1$  IEEE802.11 a/b/g/n/ac(AP6255) 4G/5G  $\mathsf{TF}\Box$ **SPDIF** LED LED\_\_\_ 1\* LED\_\_\_\_RTC\_\_\_USB\_\_

	□□100-240V 50/60Hz□□□5V/2A
	KODIDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDD
ПП	NOUSBOBTONONONO 2.4GHz USB OOOOO 2.4GHz OOOOOO

## SIM card slot

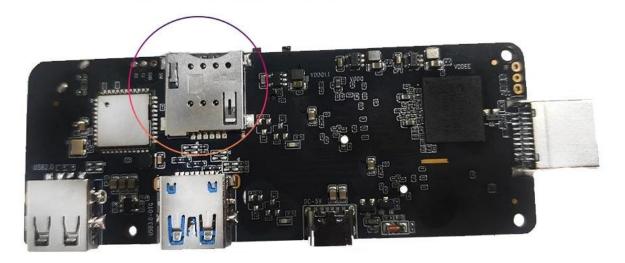

2
3. 000 <b>4K</b> 0000 000000000 4K 000000000000000000
4 Android Google Play
7. 00000 000000000000000000000000000000
3G/4G LTE WCDMA   Android
• 00000 00000000 3G/4G LTE 000000000000
Android TV BOX 3G/4G LTE WCDMA