

Boîtier TV Quad Core TM8S boîtier TV Ultra HD 4K2K Amlogic S812 Google Android 4.4 boîtier TV TM8S



Spécifications matérielles

Numéro de modèle.	TM8S
CPU	Amlogic S812 Quad Core Cortex-A9r4 2,0 GHz
GPU	GPU Octo-Core Mali™ -450MP
ÉCLAIR	FLASH NAND 8 Go

Spécifications de l'alimentation

Source de courant	C.C 5V/2A
Indicateur d'alimentation (LED)	Pouvoir ON :bleu; Veille : Rouge

Caractéristiques principales

Système d'exploitation	Google Android™ 4.4 KitKat
3D	3D-HD 1080Px2
Bluetooth™	Prise en charge du Bluetooth™ 4.0
Format de décodeur pris en charge	HDMPEG1/2/4,H.264/ H.265 , HD UN VC/VC-1,RM/RMVB,Xvid/DivX3/4/5/6,RealVideo8/9/10
Format multimédia pris en charge	Avi/Rm/Rmvp/Ts/Vob/Mkv/Mov/ISO/Wmv/Asf/Flv/Dat/Mpg/Mpeg
Format de musique pris en charge	MP3/WMA/AAC/WAV/OGG/AC3/DDP/TrueHD/DTS/DTS/HD/FLAC/APE
Format de photo pris en charge	HDJPEG/BMP/GIF/PNG/TIFF
Emplacement USB	2 USB 2.0 haute vitesse, prend en charge le disque U et le disque dur USB
Lecteur de cartes	Cartes SD/SDHC/MMC
Système de fichiers du disque dur	FAT16/FAT32/NTFS
Sous-titre de soutien	SRT/SMI/SUB/SSA/IDXUSB
Sortie vidéo haute définition	Prend en charge tous les décodages et sorties SD/HD/4K2K Ultra HD standards.
Types de Réseau localgues OSD	Anglais/Français/Allemand/Espagnol/Italien, etc. Langues multilatérales
LAN	Ethernet : 10/100 M, norme RJ-45
Sans fil	Prise en charge du Wi-Fi™ double bande (2,4 GHz/5 GHz) (AP6330)
Souris/Clavier	Prise en charge de la souris et du clavier via USB ; prise en charge de la souris et du clavier sans fil 2,4 GHz via un dongle USB 2,4 GHz

HDMI™	HDMI™ 1.4B
AV	Soutien
Optique	Soutien
3G	Soutien
SPDIF/IEC958	Optique
IPTV et OTT	Prend en charge de nombreux types de programmes IPTV et OTT


Spécifications du logiciel

Fonction réseau	Miracast, XBMC, Airplay, Skype Chat, Picasa, Youtube, Flickr, Facebook, films en ligne, etc.
Autre fonctionnalité	Recherche Internet gratuite, des milliers d'applications Android, de nombreux types de jeux, etc.



Picture Show



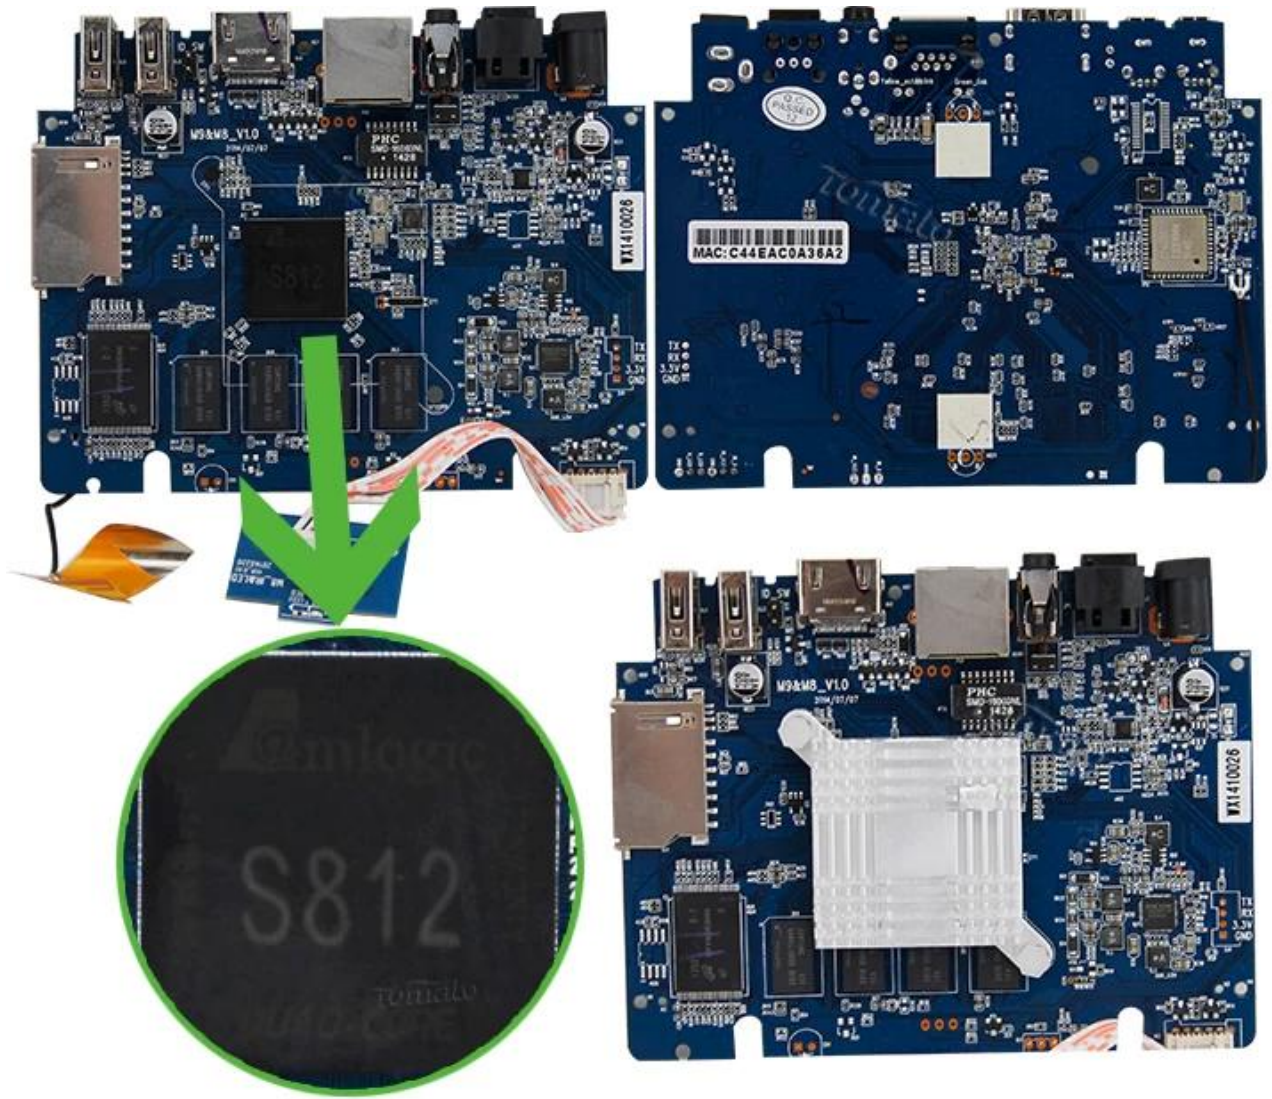



06:18 Friday, Nov 7

Online Video My recommend Settings

My Apps Music Local

4K, Home, Play Store, Android, App Store, Plus

SETTINGS

SETTINGS

Network

Display

Advanced

Other

Network

Display

Advanced

Other

Model number :
M8S

System Update

Android version :
4.4.2

More Settings

Build number :
KOT49H.20141103 test-keys

Kernel version :
3.10.33
shaoshuai.cen@wyst #2
Mon Nov 3 11:40:41 CST 2014

Miracast

Remote Control

OFF

Google TV Remote

OFF

CEC Control

Output Modes

4k2k-25hz

4k2k-30hz

4k2k-smpte

PCM



Confluence

Summary information

Summary Free memory: 937MB
 IP address: 192.168.1.195

Storage Screen resolution: 1920x1080@60.00Hz - Full screen (30.51 fps)

Network Operating system: Linux 3.10.33 #2 SMP PREEMPT Mon Nov 3 11:40:41 CST 201...
 System uptime: 0 Minutes

Video Total uptime: 0 Minutes

Hardware Battery level: 100%

PVR service

XBMC 13.2 Git:20140821-c5ae8b3 (Compiled: Sep 23 2014)

CPU Usage: CPU0: 28.6% CPU3: 31.2%

CPU-Z SOC SYSTEM BATTERY SENSORS

Cortex ARM Cortex-A9
 Intelligent Processors by ARM[®]
 1.99 GHz

CPU Architecture	ARM Cortex-A9
Cores	4
Revision	r4p1
Clock Speed	24 MHz - 1.99 GHz
Core 0	648 MHz
Core 1	stopped
Core 2	stopped
Core 3	984 MHz
CPU Load	33 %
GPU Vendor	ARM
GPU Renderer	Mali-450 MP

CPU-Z SOC SYSTEM BATTERY SENSORS ABOUT

Model	M8S (n200)
Manufacturer	MBX
Board	n200
Display	KOT49H.20141103 test-keys
Hardware	amlogic
Android Version	4.4.2
Kernel Architecture	armv7l
Kernel Version	3.10.33 (20141103)
Screen Resolution	1920 x 1008
Screen Density	240 dpi
Total RAM	1606 MB
Available RAM	984 MB (61%)
Internal Storage	5.33 GB
Available Storage	4.99 GB (93%)
Root Access	Yes

Root Checker

Device: M8S

Android: 4.4.2 | API: 19

Check Now

Status: Rooted
Id: uid=0(root) gid=0(root)
Superuser: Not found
Busybox: /system/xbin/busybox
Su Location: /system/xbin/su
Sudo Location: Not found
Environment Vars.:
/sbin/
/vendor/bin/
/system/sbin/
/system/bin/
/system/xbin/



Wifi Analyzer

VIEW SETTINGS

Tomato (50:bd:5f:2e:9b:d4)



WPA2

ChinaNet-iabK (34:cd:be:8a:7c:34)

Connected to:
Tomato
50:bd:5f:2e:9b:d4


IP address: 192.168.1.195
Gateway: 192.168.1.1
Netmask: 255.255.255.0
DNS1: 202.96.128.86
DNS2: 202.96.134.33
Server IP: 192.168.1.1

Tomato	Connected
ChinaNet-iabK	Secured with WPA/WPA2 (WPS available)
HiWiFi_012	Secured with WPA/WPA2
ChinaNet-b	Secured with WPA/WPA2
ChinaNet-c	Secured with WPA/WPA2
82583300	Secured with WPA/WPA2

Tomato

Status	Connected
Signal strength	Excellent
Link speed	65Mbps
Security	WPA/WPA2 PSK
IP address	192.168.1.195

Cancel Forget



WPA



About MediaBox

System updates

Status
Status of network and other information

Legal information

Model number
M8S

Android version
4.4.2

Kernel version
3.10.33
shaoshuai.cen@wyst #2
Mon Nov 3 11:40:41 CST 2014

Build number
KOT49H.20141103 test-keys

Ethernet Infor
IP address,DNS,MAC address,etc.



Apps

DOWNLOADED RUNNING

	Settings 1 process and 0 services	21MB
	SettingsMbox 1 process and 1 service	26MB 04:23
	PPPoE 1 process and 1 service	3.4MB 04:03
	Google Play services 1 process and 3 services	15MB 02:37
	Google Play services 1 process and 2 services	12MB 04:24
	Google Play Store 1 process and 1 service	7.9MB 04:19

Storage

INTERNAL STORAGE

Total space
5.33GB

Available
4.98GB

Apps (app data & media content)
347MB

Pictures, videos
20.00KB

Cached data
68.97MB

Misc.
1.72MB

SD CARD

Mount SD card
Insert an SD card for mounting

