

# Android 4.4 Smart Tv Box Amlogic S812 Quad Core с Bluetooth 4.0 поддержка UHD 4K H.265 TM8C



## Спецификации оборудования

Но модели	TM8C
ПРОЦЕССОР	Amlogic S812 четырехъядерных Cortex-A9r4 2,0 ГГц
GPU	Octo-Core Mali™ -450MP GPU
ВСПЫШКА	8 ГБ NAND FLASH
SDRAM	1 ГБ DDR3

## Спецификации блока питания

Блок питания	DC 5V/2A
Индикатор питания (LED)	Мощность НА : синий; Режим ожидания: красный

## Основные характеристики

OS	Google Android™ 4.4 KitKat
3D	3D-HD 1080Px2
Bluetooth™	Поддержка Bluetooth™ 4.0
Поддержка декодер Формат	HD0 MPEG1/2/4,H.264/H.265, HD AVC/VC-1, RM/RMVB, Xvid/DivX3/4/5/6 , RealVideo8/9/10
Поддержка медиа формат	AVI/Rm/RmVb/Ts/Vob/Mkv/Mov/ISO/Wmv/Asf/Flv/Dat/Mpg/Mpeg
Поддержка музыкальный формат	MP3/WMA/AAC/WAV/OGG/AC3/DDP/TrueHD/DTS/DTS/HD/FLAC/ОБЕЗЪЯНА
Поддержка фото формата	HD JPEG/BMP/GIF/PNG/TIFF
USB-хост	2 высокая скорость USB 2.0, поддержка U ДИСК и жесткий ДИСК USB
Кард-ридер	SD/SDHC/MMC карты
HDD файловая система	FAT16/FAT32/NTFS
Поддержка субтитров	SRT, SMI, SUB, SSA/IDX + USB
Высокой четкости видео Выход	Поддержка всех стандартных SD/HD/4K2K Ultra HD декодирования и вывода
Тип OSD языков	Английский/Французский/Немецкий/Испанский/Итальянский etc многосторонние языки
ДОСТУП В ИНТЕРНЕТ	Ethernet: 10 / 100M, Стандарт RJ-45
Беспроводные	2.4 GHz Wi-Fi™ (Ar6210)
Мышь/клавиатура	Поддержка мыши и клавиатуры через USB; Поддержка 2,4 ГГц Vireless мышь и клавиатуру через 2,4 ГГц USB ключ
HDMI™	HDMI™ 1.4B
AV	Поддержка
Оптические	Поддержка
3G	Поддержка
SPDIF/IEC958	Оптические
IPTV и OTT	Поддержка многих видов IPTV и OTT программы

## Характеристики программного обеспечения

Функция сети	Miracast, XBMC, Airplay, Skype Беседа, Picasa, Youtube, мерцание, Facebook, онлайн фильмы, etc
Другая особенность	Бесплатный Интернет Поиск, тысячи приложений Android, много видов игр, etc

Особенности:

Android 4.4 Smart Tv Box является инновационный мультимедийный центр с Android операционной системы, которая позволяет воспроизводить и просматривать содержимое без оплаты кабеля или ежемесячной подписки. Просто подключите его и откройте для себя весь мир ТВ, ТВ шоу, спортивные мероприятия, фотографии, музыку и многое другое.

Что находится в коробке?

1 \* android 4.4 Smart Tv Box

1 \* HDMI кабель

1 \* пульт дистанционного управления

1 \* адаптер питания

1 \* Руководство пользователя



# Picture Show



SD Card Port

Indicator Light



USB\*2

HDMI


ETHERNET

AV

OPTICAL





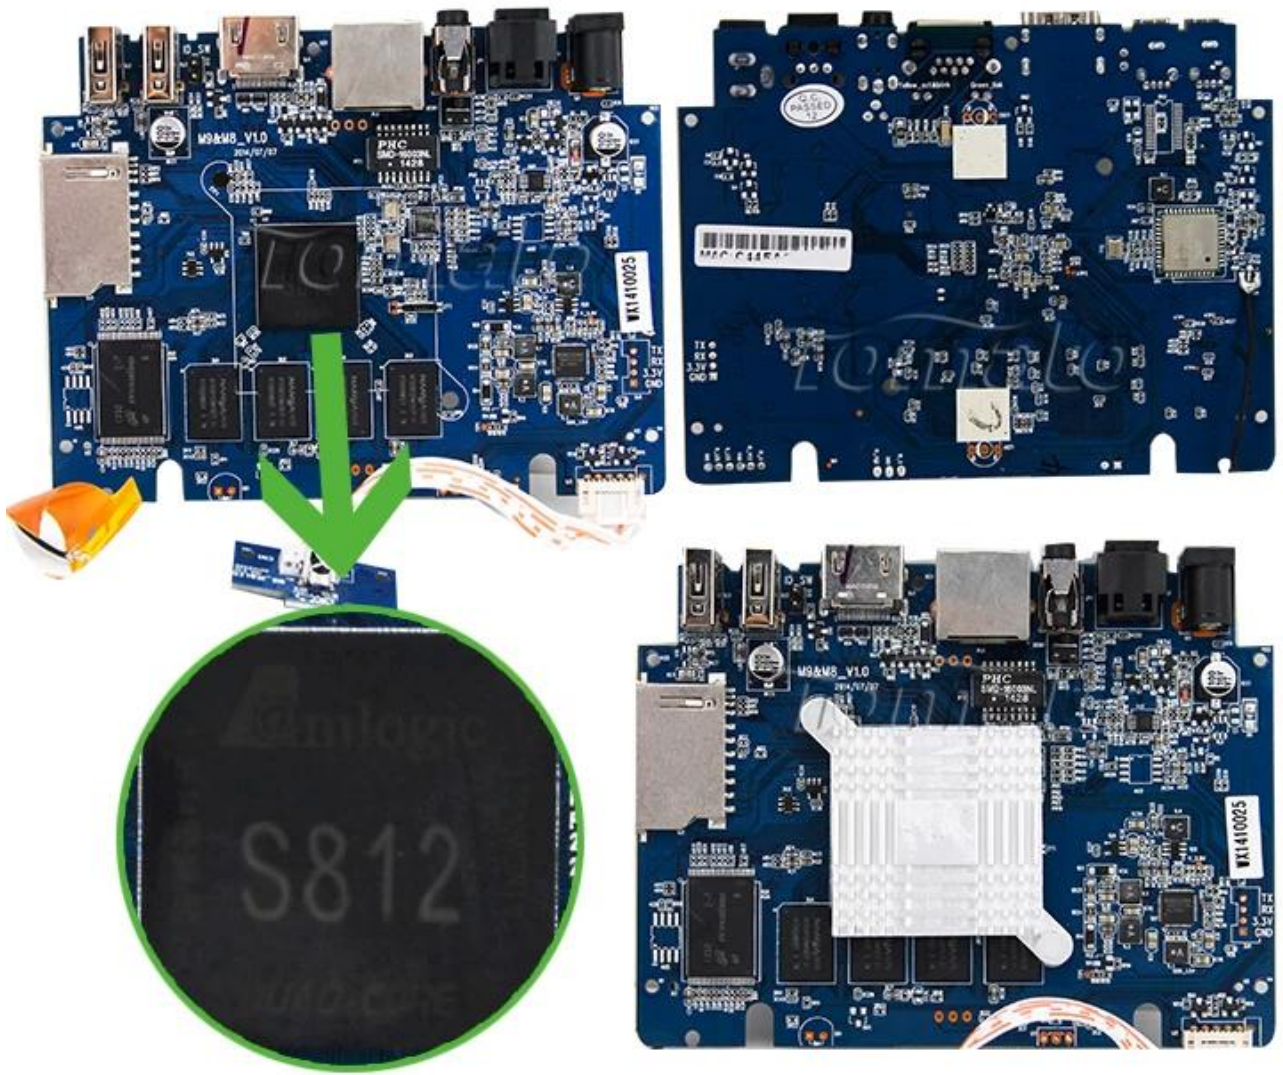







Power Port







05:44 Friday, Nov 7

 Online Video	 My recommend	 Settings			
 My Apps	 Music	 Local			
					

 My Apps

1/26

 AppInsta...	 Browser	 Calculator	 Clock	 Downloa...	 Email
 Facebook	 FileBrow...	 Gallery	 Google S...	 Media C...	 Miracast
 MoviePl...	 Music	 Netflix	 People	 Play Store	 PPPoE



# SETTINGS

Network | Display | **Advanced** | Other

**Output Modes**

- HDMI auto  OFF
- HDMI Output 4k2k-24hz
- Hide Status 4k2k-25hz
- Display Pos 4k2k-30hz
- Start screen saver Never  4min 8min 12min

# SETTINGS

Network | Display | **Advanced** | Other

**Miracast**

Remote Control  OFF

Google TV Remote  OFF

CEC Control

Application request to change orientation

Keep landscape mode on home screen

Digital audio auto-detection  OFF

Digital Audio Output PCM

Network | Display | **Advanced** | Other

Model number : M8C [System Update](#)

Android version : 4.4.2 [More Settings](#)

Build number : KOT49H.20141031 test-keys

Kernel version : 3.10.33  
shaoshuai.cen@wyst #1  
Thu Oct 30 16:56:56 CST 2014



# SETTINGS

Network | Display | **Advanced** | Other

**Output Modes**

- HDMI auto  OFF
- HDMI Output 4k2k-24hz
- Hide Status 4k2k-25hz
- Display Pos 4k2k-30hz
- Start screen saver Never  4min  8min  12min

# SETTINGS

Network | Display | **Advanced** | Other

Model number : M8C [System Update](#)

Android version : 4.4.2 [More Settings](#)

Build number : KOT49H.20141031 test-keys

Kernel version : 3.10.33  
shaoshuai.cen@wyst #1  
Thu Oct 30 16:56:56 CST 2014

Miracast

Remote Control  OFF

Google TV Remote  OFF

CEC Control

Application request to change orientation

Keep landscape mode on home screen

Digital audio auto-detection  OFF

Digital Audio Output PCM

# Root Checker

Device: M8C

Android: 4.4.2 | API: 19

**Check Now**

Status: Rooted  
Id: uid=0(root) gid=0(root)  
Superuser: Not found  
Busybox: /system/xbin/busybox  
Su Location: /system/xbin/su  
Sudo Location: Not found  
Environment Vars.: /sbin/  
/vendor/bin/  
/system/sbin/  
/system/bin/  
/system/xbin/

# Wifi Analyzer

Tomato (50:bd:5f:2e:9b:d4)



ChinaNet-iabK (34:cd:be:8a:7c:34)

Connected to:  
**Tomato**  
50:bd:5f:2e:9b:d4  
IP address: 192.168.1.193  
Gateway: 192.168.1.1  
Netmask: 255.255.255.0  
DNS1: 202.96.128.86  
DNS2: 202.96.134.33  
Server IP: 192.168.1.1

Network Name	Security	Manufacturer
Tomato	Connected	HUAWEI TECHNOLOGIES CO., LTD
ChinaNet-iabK	Secured with WPA/WPA2 (WPS available)	CISCO-LINKSYS
yishuai161	Secured with WPA/WPA2 (WPS available)	ZTE CORPORATION
ChinaNet-9	Secured with WPA/WPA2 (WPS available)	.INK TECHNOLOGIES CO., LTD
82583300	Secured with WPA/WPA2 (WPS available)	
CMCC-AUTO	Secured with 802.1x	
eLuoHu(free)		
CMCC		

**Tomato**

Status	Connected
Signal strength	Excellent
Link speed	65Mbps
Security	WPA/WPA2 PSK
IP address	192.168.1.193

Cancel Forget





*Confluence*  
*Tomato*

Summary information

- Summary: Free memory: 119MB  
IP address: 192.168.1.193
- Storage: Screen resolution: 1920x1080@60.00Hz - Full screen (30.01 fps)
- Network: Operating system: Busy  
System uptime: Busy
- Video: Total uptime: Busy  
Battery level: Busy
- Hardware
- PVR service

XBMC 13.2 Git:20140821-c5ae8b3 (Compiled: Sep 23 2014)

CPU Usage: CPU0: 53.3% CPU1: 22.4% 

Memory Used: 80% 

SYSTEM BATTERY SENSORS ABOUT

Model	M8C (n200)
Manufacturer	MBX
Board	n200
Display	KOT49H.20141031 test-keys
Hardware	amlogic
Android Version	4.4.2
Kernel Architecture	armv7l
Kernel Version	3.10.33 (20141031)
Screen Resolution	1920 x 1008
Screen Density	240 dpi
Total RAM	590 MB
Available RAM	126 MB (21%)
Internal Storage	5.33 GB
Available Storage	4.99 GB (93%)
Root Access	Yes

**Cortex** ARM Cortex-A9  
Intelligent Processors by ARM<sup>®</sup>  
1.99 GHz

CPU Architecture	ARM Cortex-A9
Cores	4
Revision	r4p1
Clock Speed	24 MHz - 1.99 GHz
Core 0	1608 MHz
Core 1	stopped
Core 2	stopped
Core 3	stopped
CPU Load	6 %
GPU Vendor	ARM
GPU Renderer	Mali-450 MP



Storage Tomato 5:48

---

INTERNAL STORAGE

Total space	5.33GB
Available	4.98GB
Apps (app data & media content)	347MB
Pictures, videos	20.00KB
Cached data	68.92MB
Misc.	2.28MB

SD CARD

About MediaBox 5:48

---

System updates

---

Status  
Status of network and other information

---

Legal information

---

Model number  
M8C

---

Android version  
4.4.2

---

Kernel version  
3.10.33  
shaoshuai.cen@wyst #1  
Thu Oct 30 16:56:56 CST 2014

---

Build number  
KOT49H.20141031 test-keys

---

Ethernet Infor  
IP address,DNS,MAC address,etc.

Tomato