

Amlogic S928X Android

OS

Android 10 Amlogic S928X

CPU Amlogic S928X ARM Cortex-A76 ARM Cortex-A55

GPU ARM Mali-G57 MC2 4K GUI OpenGL ES 3.2 Vulkan 1.2 OpenCL 2.0

NPU 3.2

RAM 64 GB DDR4 LPDDR4/4X 8GB DDR4266

eMMC eMMC 5.1 SLC NAND

Amlogic AVE

AV1 MP-10 @ L6.1 8Kp60

VP9 Profile-2 @ 6.1 8Kp60

H.265 HEVC MP-10 @ L6.1 8Kp60

AVS3 1 8Kp60

AVS2-P2 8Kp60

H.264 AVC HP @ L5.2 4Kp60

Video Codec MPEG-4 WMV/VC-1 AVS MPEG-2 MPEG-1 1080p60

MJPEG JPEG (ISO/IEC-10918)

4x 4Kp60

JPEG 4Kp60

H.265 4Kp60

H.264 4Kp60

8 Amlogic TruLife Dolby Vision HDR10 HDR10+ HLG HDR Vivid

AI Acceleration 3.2 TOPS (NNA) (TPU) TensorFlow Caffe

Connectivity HDMI 2.1a PHY CEC HDR HDCP 2.2/2.3 8Kp60

eARC VRR QMS QFT ALLM DSC SBTM

MP3 AAC WMA RM FLAC Ogg Vorbis Opus SRS TruVolume Dolby Audio

DTS 7.1/5.1

VAD

Audio Output SPDIF 192kHz 16/24/32

3 TDM/PCM/I2S TDM/PCM 48kHz x 32bits x 32ch 192kHz x 16bits x

16ch I2S 384kHz x 32bits x 16ch


PDM CIC LPF HPF 8 DMIC

DAC

Network 10/100/1000 MAC

USB 2.0 1x USB XHCI OTG 2.0 2x USB 2.0 1x USB 3.0 (5 Gbps) PCIe 2.0

S928X

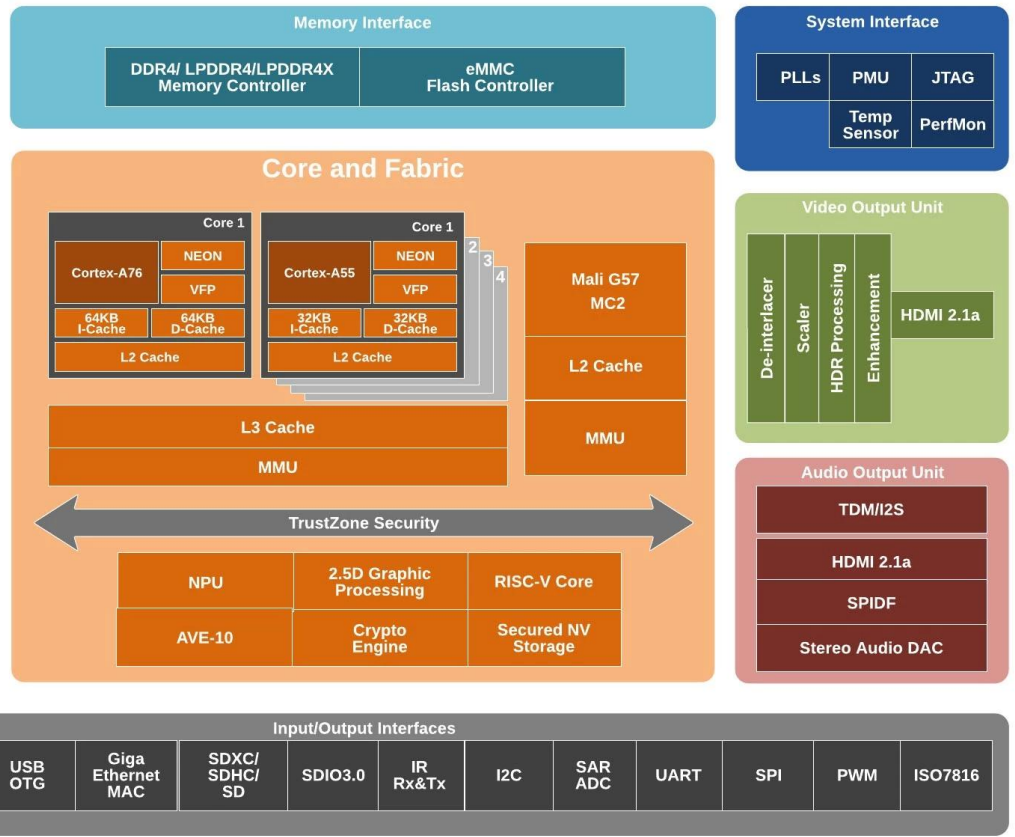

* Supported configuration: PCIe 2.0 port + USB 2.0 Host, or USB3.0 port without PCIe.







Amlogic S928X ARM Cortex-A76 ARM Cortex-A55 8K SoC
—AV1 H.265 VP9 AVS3 AVS2 8Kp60 4K GUI SR

Amlogic S928X S928X

S928X ARM Cortex-A53 CPU 4K S928X

S928X 60 4K HDR10 HLG

S928X Mali-G31 MP2 GPU OpenGL ES3.2 Vulkan 1.1
OpenCL 2.0

S928X Android TV 10 Google Assistant

S928X 支持Wi-Fi 5.0 HDMI USB

Amlogic S928X S928X

Amlogic S928X 8K Android Wi-Fi HDR 8K USB 3.0 5.0

8K Amlogic S928X Android