

# Caixa de TV Android com porta RJ45 e sistema Android Interface Style Quad Core



## Especificações do Apêndice

Modelo:	Android Smart Mini Box
CPU	RK3288 Ultra Quad-Core Cortex-A17 Series, até 1,8 GHz
Frequência principal	Quad-core Arm Cortex-A17 CPU com até 1,8 GHz e GPU é Mali™ -t764
Memória interna	2G DDR3
Memória	8g
Sistema operacional	Android 4.4.2
Interface do usuário	Estilo do sistema Android™ 4K H.264/H.265 Decodificador, 1080p Decodificadores multidi-videi 1080p Video Coding para H.264 e VP8, MVC
Vídeo	
Áudio	Mp3/wma/macac/flat/aac/ogg/ac3/wav etc.
Foto	Suporta variedade de formatos de imagem navegando (JPG □ png □ BMP etc. )
Clarão	Suporta flash
Expansão de armazenamento	Suportar cartão TF e expansão do disco rígido móvel
USB	1 host USB 2.0 Suporte 3G
Cartão tf	Apoie a capacidade UO a 32 GB
HDMI™	HDMI™ 2.0 3D Saída HD (1080p)
Bluetooth™	BT 4.0
Wifi™	2.4G/5G WIFI™
Rj45	Conexão a rede de arame
Áudio óptico	Suporta saída óptica de áudio
Controle remoto	Suporte ao controle remoto IR e 2.4g sem fio
Parâmetros de tensão	5V-2.5A DC



## Picture Show







Wi-Fi

WIRELESS & NETWORKS

Wi-Fi

Bluetooth

Ethernet

Data usage

More...

DEVICE

USB

Wi-Fi

wifi is enabled, click to turn it off

Tomato

Connected

Status

Signal strength

Link speed

Security

Connected

Good

65Mbps

WPA2 PSK

Ethernet

Bluetooth

Ethernet

Data usage

More...

DEVICE

USB

Sound

Display

Ethernet

Ethernet is enabled

MAC

5a:d0:02:2b:4a:4a

IP address

0.0.0.0

netmask

0.0.0.0

gateway

0.0.0.0

dns1

0.0.0.0

Storage

Display

ScreenshotSetting

Storage

Apps

PERSONAL

Security

Language & input

Backup & reset

INTERNAL STORAGE

Total space

1.91 GB

Available


1.61 GB

Apps (app data & media content)


288 MB

Cached data

54.93 MB

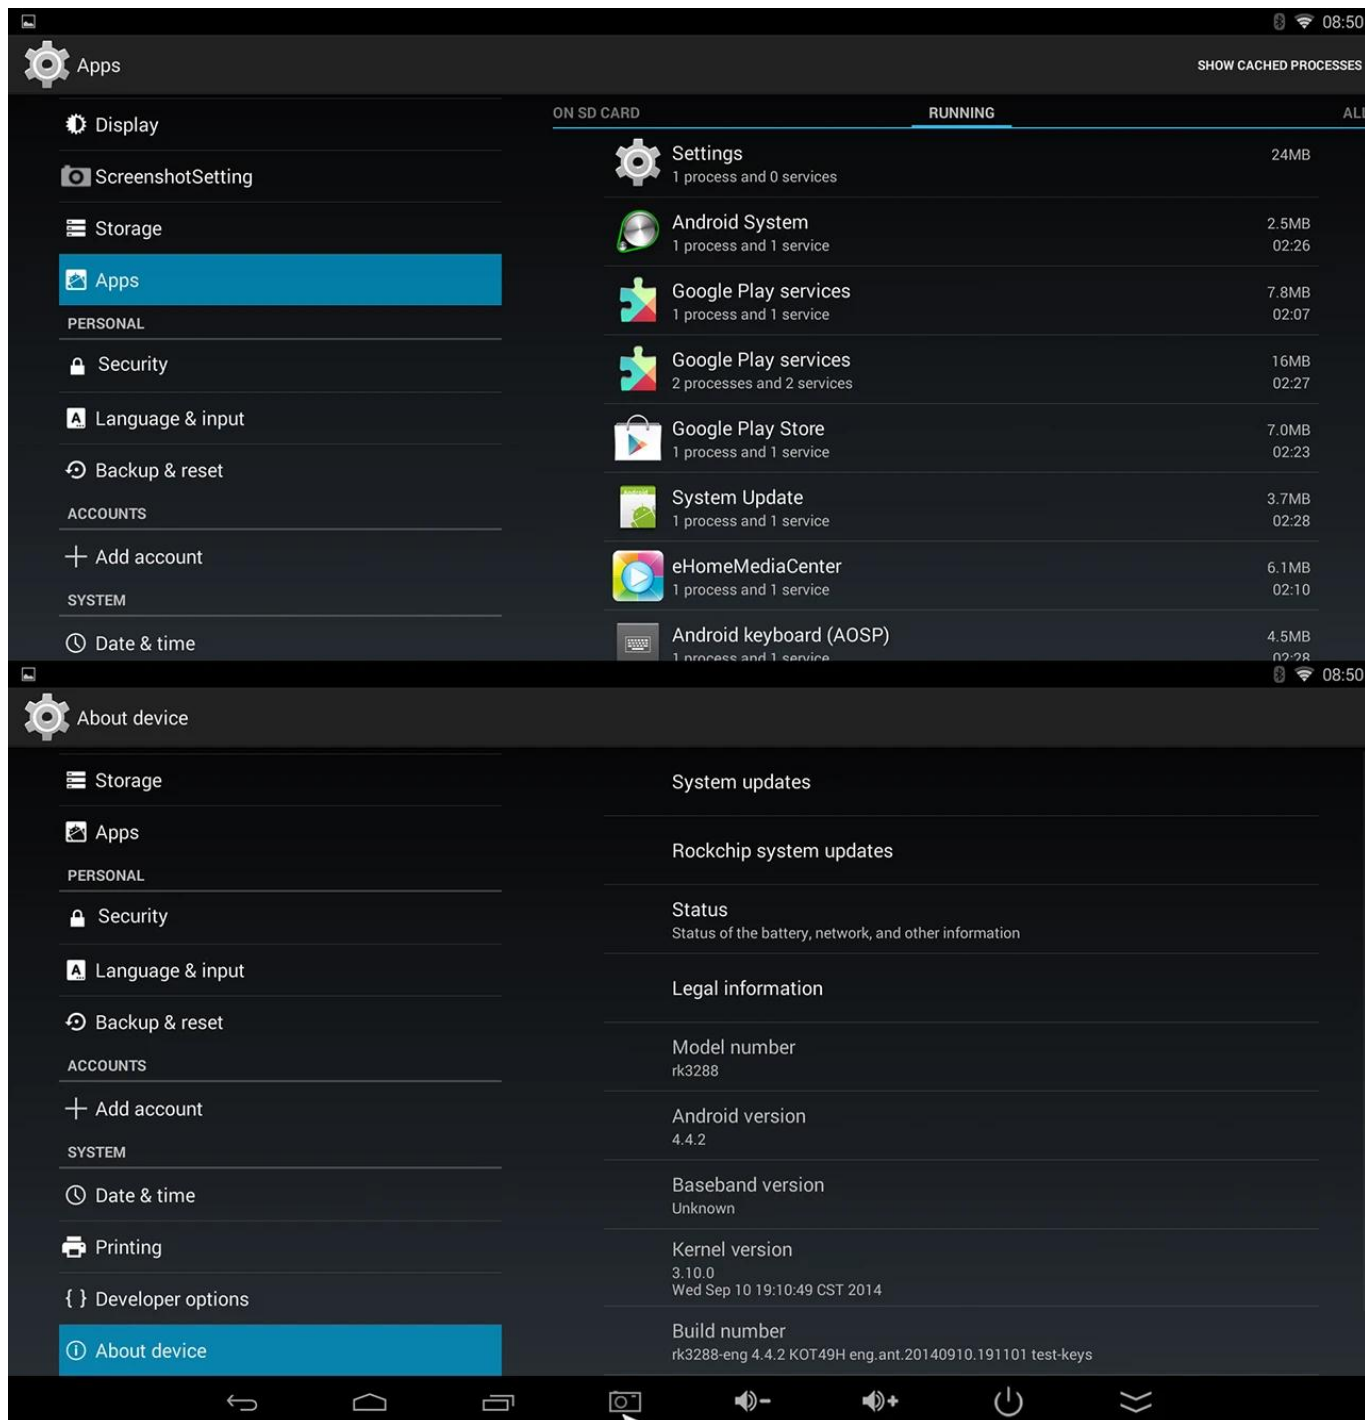



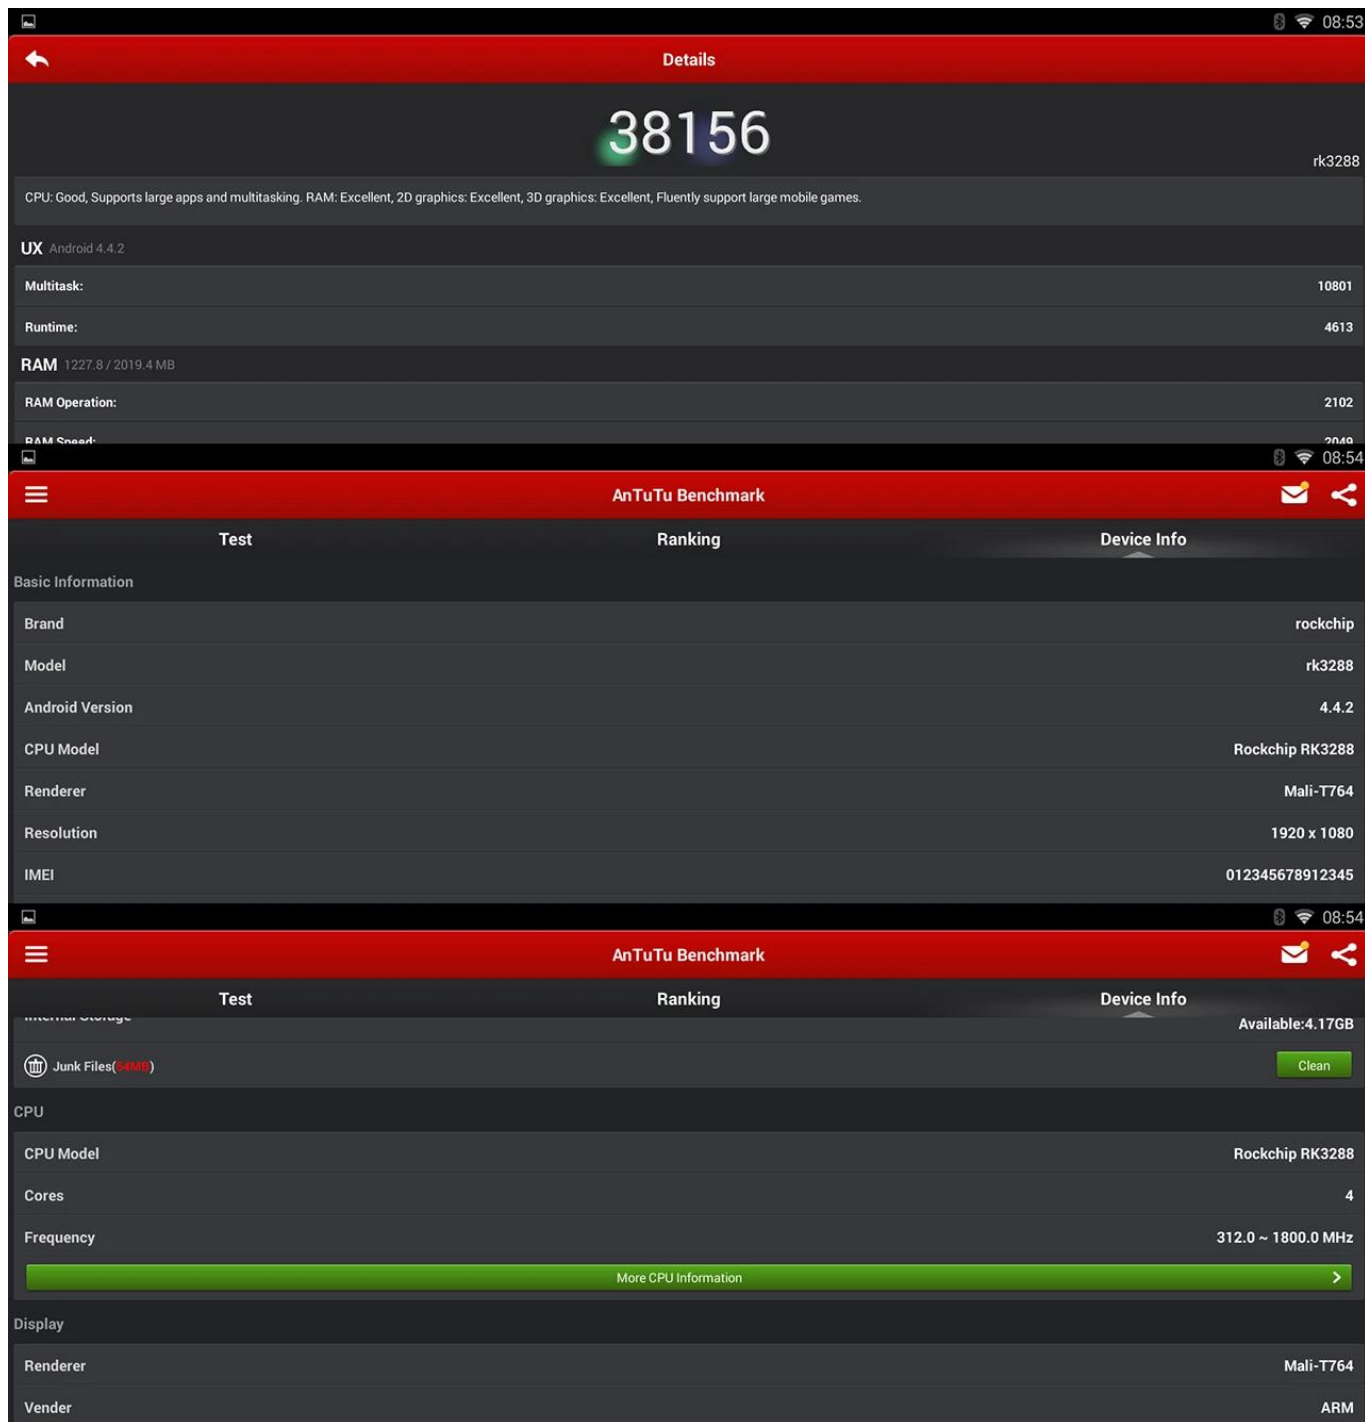

CPU-Z

SOC

SYSTEM

BATTERY

SENSORS

ABOUT

ARM

ARM 0xc0d  
1.80 GHz

CPU Architecture	ARM 0xc0d
Cores	4
Revision	r0p1
Clock Speed	312 MHz - 1.80 GHz
Core 0	600 MHz
Core 1	600 MHz
Core 2	600 MHz
Core 3	600 MHz
CPU Load	3 %
GPU Vendor	ARM
GPU Renderer	Mali-T764

CPU-Z

SOC

SYSTEM

BATTERY

SENSORS

ABOUT

Model	rk3288 (rk3288)
Manufacturer	rockchip
Board	rk30sdk
Display	rk3288-eng 4.4.2 KOT49H eng.ant.20140910.191101 test-keys
Hardware	rk30board
Android Version	4.4.2
Kernel Architecture	armv7l
Kernel Version	3.10.0 (eng.ant.20140910.191101)
Screen Resolution	1920 x 1008
Screen Density	240 dpi
Total RAM	2019 MB
Available RAM	989 MB (48%)
Internal Storage	1.91 GB
Available Storage	1.62 GB (85%)
Root Access	Yes

Wifi Analyzer

VIEW

SETTINGS

Connected to:  
Tomato  
a8:15:4d:67:8e:0e

Tomato (a8:15:4d:67:8e:0e)

CH 1 2412 MHz -52 dBm TP-LINK TECHNOLOGIES CO., LTD

WPA2

Hung (b8:55:10:8a:40:cc)

CH 11 2462 MHz -51 dBm ZIONCOM ELECTRONICS (SHENZHEN) LTD

WPA2

HiWiFi\_0122A2 (d4:ee:07:01:22:a2)

CH 1 2412 MHz -50 dBm HIWIFI CO., LTD