

Android TV Box Supplier

Specifications

Model No.	Amlogic A311D Android TV Box Supplier
CPU	Amlogic A311D Quad Core ARM Cortex A73 and Dual Core ARM Cortex A53 1.98Ghz
GPU	ARM Mali-G52 MP4 (6EE) OpenGL ES 3.2, Vulkan 1.1 and OpenCL 2.0
RAM	DDR4 2GB/4GB
ROM	16GB eMMC (Expandable up to 128GB)
OS	Android 9.0

Video&Audio CODEC

Decoding resolution	Support 4K H265 10Bit, H.264, AVS, MPEG-2 and many other formats
Multimedia Support	Support MPEG1, MPEG2, MPEG4, H.264, WMV, MKV, TS, flv and other video formats; Support MP3 and other audio formats; support JPG, JPEG, BMP, PNG, GIF and other photo formats

Port

Video output	1 channel LVDS 40-pin 2.0mm double-pin, can support 8bit, 10bit screen; 1 channel HDMI output; 1 channel AV output
Video input	x1, MIPI CSI
Audio output	4-pin 2.5mm socket 25W@2 amplifier and 3W@2 speaker
Network interface	x1, 10M/100M Ethernet WIFI+BT, 2.4G single band or 2.4G/5G dual band for options PCIE slot (4G) x1 or M.2 slot (4G) x1 for options
USB2.0 interface	USB OTG x1 (available for HOST) USB HOST x7
Backlight interface	x2, 6-pin 2.0mm socket
Infrared interface	x1, 7-pin 2.0mm socket, supports both red and green LED indicators
Function expansion port	Serial ports x4
TF card slot	x1
SIM card slot	x1
RTC	Supports time synchronization

Power


Power Supply	12V, 2.5DC Connector
--------------	----------------------

S922X



Supported configuration: PCIe2.0 port + USB2.0 Host, or USB3.0 without PCIe


S055T01

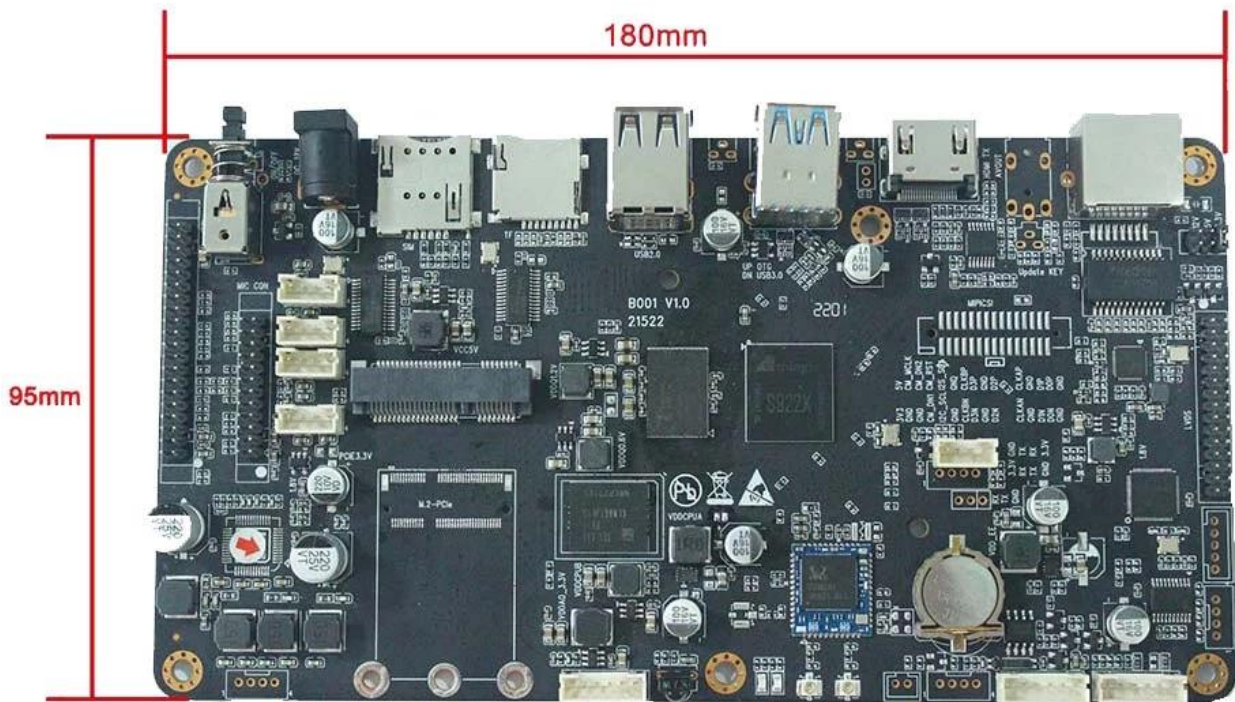

180mm*95mm*20mm

02159 10 1428027

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

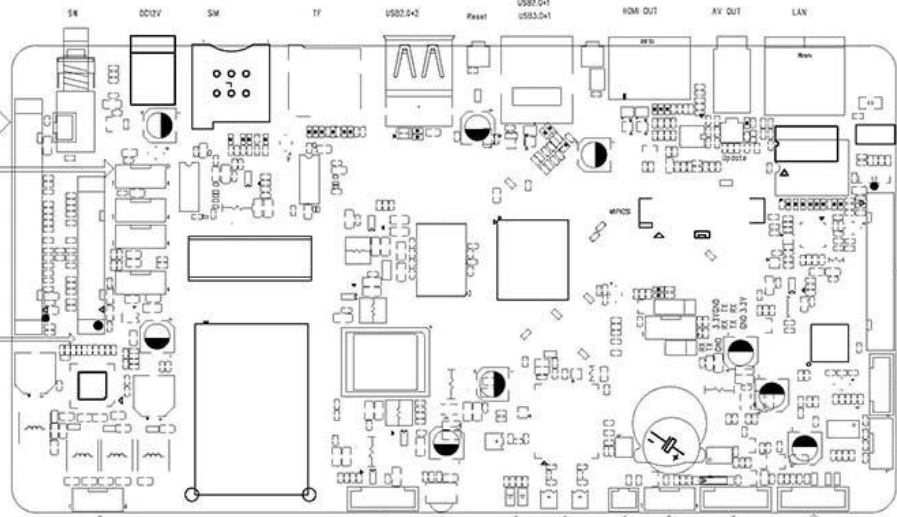


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

LVDS

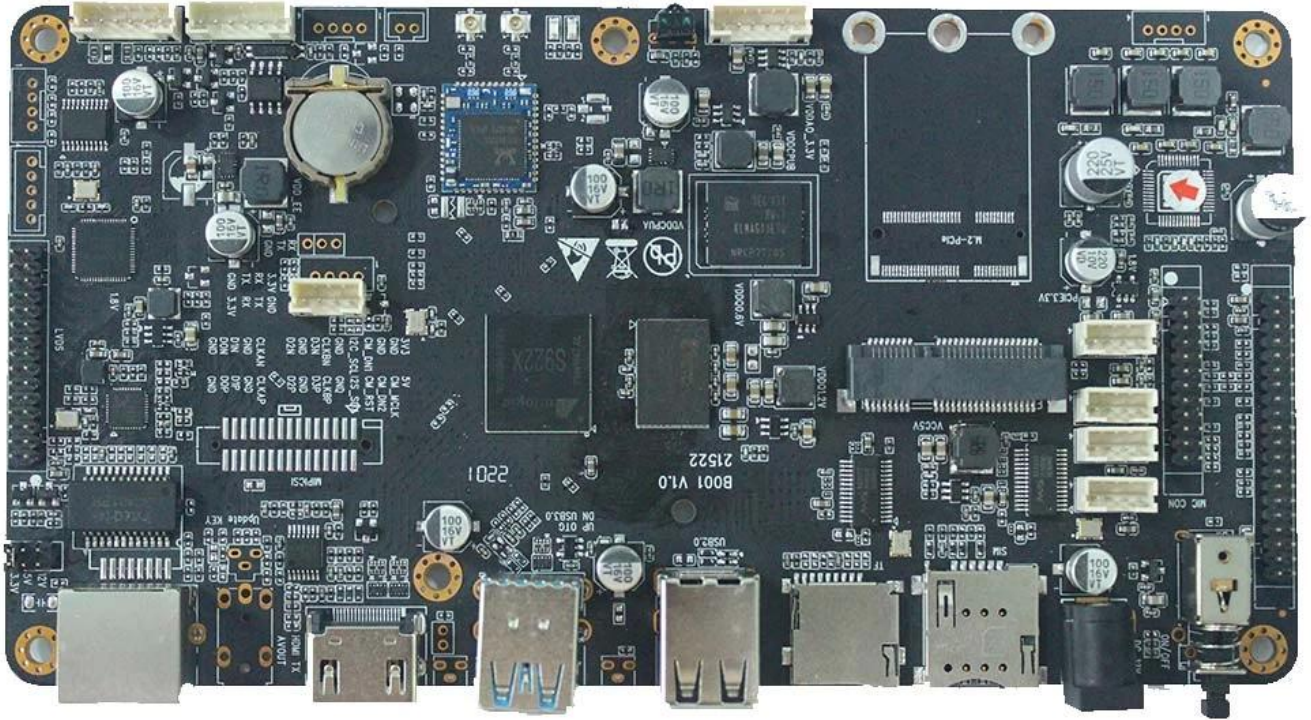

Amlogic A311D Android Development Board multimedia network player-LCD driver integrated board adopts Amlogic A311D 12nm high-end chip, which supports UHD 4K@60fps hardware video decoding. It also supports supports H.265 10-bit, H.264 and AVS+ and many other formats. Support HDR10 and HLG high dynamic range processing, with multi-channel UART and USB interfaces. Support Bluetooth, WIFI, 4G and Ethernet functions. Support AV serial use, SD card expansion. Perfectly supports all kinds of touch screens, suitable for high-performance intelligent display terminal equipment, industrial automation terminal, computer vision/algorithm, 3D experience, game/amusement equipment, high-performance face recognition computing/storage, AI intelligence, etc. It can be widely used as a high-end intelligent motherboard for various industries such as finance, advertising, security, transportation, and public transportation.

(1) With various interfaces

- 1 channel LVDS video output (40pins)
- 1 channel HDMI video output
- 5 channels USB2.0
- 4 channels RS232 (can be modified to USB2.0 by patch)
- 1 channel MIPI CSI
- 1 channel AV output
- 1 channel I2C
- I2SC/IS2B
- 1 channel 25W super power amplifier and 3W speaker interface

- (2) Hybrid networking to break through network constraints
 - Support wired, WiFi and 4G access, can realize multi-network hybrid networking
- (3) Easy to operate & fast maintenance
 - Support breakpoint playback
 - Super multi-period timing switch function
 - Support U disk loading or direct playback
 - Support automatic repair, remote upgrade, intelligent domain name resolution

Chip Performance

CPU Sub-system

- (1) Quad Core ARM Cortex-A73 and Dual Core ARM Cortex-A53 CPU
- (2) ARMv8-A architecture with Neon and Crypto extensions
- (3) Unified system L2 cache
- (4) Build-in Cortex-M4 core for always on processing
- (5) Advanced TrustZone security system
- (6) Application based traffic optimization using internal QoS-based switching fabrics

3D Graphics Processing Unit

- (1) ARM Mali-G52 MP4 (4ppc) GPU
- (2) 8-wide warps, 2x dual texture pipe, 6x8-wide execution engines (EE)
- (3) Concurrent multi-core processing
- (4) OpenGL ES3.2, Vulkan 1.0 and OpenCL 2.0 support

Video/Picture CODEC

- (1) Amlogic Video Engine (AVE) with dedicated hardware decoders and encoders
- (2) Support multi-video decoder up to 4Kx2K@60fps+1x1080P@60fps
- (3) Supports multiple "secured" video decoding sessions and simultaneous decoding and encoding
- (4) Video/Picture Decoding

VP9 Profile-2 up to 4Kx2K@60fps

H.265 HEVCMP-10@L5.1 up to 4Kx2K@60fps

AVS2-P2 Profile up to 4Kx2K@60fps

H.264 AVCHP@L5.1 up to 4Kx2K@30fps

H.264 MVC up to 1080P@60fps

MPEG-4 ASP@L5 up to 1080P@60fps (ISO-14496)

WMV/VC-1 SP/MP/AP up to 1080P@60fps

AVS-P16(AVS+) /AVS-P2 JiZhun Profile up to 1080P@60fps

MPEG-2 MP/HL up to 1080P@60fps (ISO-13818)

MPEG-1MP/HL up to 1080P@60fps (ISO-11172)

RealVideo 8/9/10 up to 1080P@60fps

Multiple language and multiple format sub-title video support

MJPEG and JPEG unlimited pixel resolution decoding (ISO/IEC-10918)

Supports JPEG thumbnail, scaling, rotation and transition effects

Supports *.mkv, *.wmv, *.mpg, *.mpeg, *.dat, *.avi, *.mov, *.iso, *.mp4, *.rm and *.jpg file formats

(5) Video/Picture Encoding

Independent JPEG and H.265/H.264 encoder with configurable performance/bit-rate

JPEG image encoding

H.265/H.264 video encoding up to 1080P@60fps with low latency

Video Output

- (1) Built-in HDMI 2.1 transmitter including both controller and PHY with CEC, Dynamic HDR and HDCP 2.2, 4Kx2K@60 max resolution output
- (2) CVBS 480i/576i standard definition output
- (3) Supports all standard SD/HD/FHD video output formats: 480i/p, 576i/p, 720p, 1080i/p and 4Kx2K
- (4) 4-lane MIPI DSI interface, resolution up to 1920*1080 with rotation and panel calibration

Chip Performance

CPU Sub-system

- (7) Quad Core ARM Cortex-A73 and Dual Core ARM Cortex-A53 CPU
- (8) ARMv8-A architecture with Neon and Crypto extensions
- (9) Unified system L2 cache
- (10) Build-in Cortex-M4 core for always on processing
- (11) Advanced TrustZone security system
- (12) Application based traffic optimization using internal QoS-based switching fabrics

3D Graphics Processing Unit

- (5) ARM Mali-G52 MP4 (4ppc) GPU
- (6) 8-wide warps, 2x dual texture pipe, 6x8-wide execution engines (EE)
- (7) Concurrent multi-core processing
- (8) OpenGL ES3.2, Vulkan 1.0 and OpenCL 2.0 support

Video/Picture CODEC

- (6) Amlogic Video Engine (AVE) with dedicated hardware decoders and encoders
- (7) Support multi-video decoder up to 4Kx2K@60fps+1x1080P@60fps
- (8) Supports multiple "secured" video decoding sessions and simultaneous decoding and encoding
- (9) Video/Picture Decoding

VP9 Profile-2 up to 4Kx2K@60fps

- H.265 HEVCMP-10@L5.1 up to 4Kx2K@60fps
- AVS2-P2 Profile up to 4Kx2K@60fps
- H.264 AVCHP@L5.1 up to 4Kx2K@30fps
- H.264 MVC up to 1080P@60fps
- MPEG-4 ASP@L5 up to 1080P@60fps (ISO-14496)

WMV/VC-1 SP/MP/AP up to 1080P@60fps

- AVS-P16(AVS+) /AVS-P2 JiZhun Profile up to 1080P@60fps
- MPEG-2 MP/HL up to 1080P@60fps (ISO-13818)

MPEG-1MP/HL up to 1080P@60fps (ISO-11172)

RealVideo 8/9/10 up to 1080P@60fps

- Multiple language and multiple format sub-title video support
- MJPEG and JPEG unlimited pixel resolution decoding (ISO/IEC-10918)
- Supports JPEG thumbnail, scaling, rotation and transition effects

Supports *.mkv, *.wmv, *.mpg, *.mpeg, *.dat, *.avi, *.mov, *.iso, *.mp4, *.rm and *.jpg file formats

(10) Video/Picture Encoding

Independent JPEG and H.265/H.264 encoder with configurable performance/bit-rate

JPEG image encoding

H.265/H.264 video encoding up to 1080P@60fps with low latency

Video Output

- (5) Built-in HDMI 2.1 transmitter including both controller and PHY with CEC, Dynamic HDR and HDCP 2.2, 4Kx2K@60 max resolution output
- (6) CVBS 480i/576i standard definition output
- (7) Supports all standard SD/HD/FHD video output formats: 480i/p, 576i/p, 720p, 1080i/p and 4Kx2K
- (8) 4-lane MIPI DSI interface, resolution up to 1920*1080 with rotation and panel calibration

Welcome to our range of premium Amlogic A311D Android TV Boxes, where cutting-edge technology meets superior entertainment. As a trusted supplier, we are dedicated to providing you with a seamless and immersive viewing experience that redefines your entertainment standards.

Powerful Amlogic A311D Chipset:

Our Android TV Box is powered by the advanced Amlogic A311D chipset, ensuring smooth and responsive performance for all your entertainment needs. Whether you're streaming high-definition content, playing graphics-intensive games, or multitasking between apps, the Amlogic A311D chipset delivers exceptional speed and efficiency.

4K Ultra HD Streaming:

Experience breathtaking visuals with support for 4K Ultra HD streaming. Watch your favorite movies, TV shows, and videos in stunning detail and clarity, bringing every scene to life on your big screen.

Advanced Gaming Capabilities:

Immerse yourself in a world of gaming with our Android TV Box's advanced gaming capabilities. From casual games to intense multiplayer experiences, the Amlogic A311D chipset ensures smooth gameplay with high frame rates and responsive controls.

Seamless App Integration:

Access a vast library of apps, games, and streaming services with seamless integration on our Android TV Box. Customize your entertainment experience, discover new content, and stay connected with the latest apps directly from your device.

Dual-Band Wi-Fi and Ethernet Connectivity:

Stay connected with dual-band Wi-Fi and Ethernet connectivity options. Enjoy fast and stable internet access for streaming, downloading, and browsing, ensuring uninterrupted entertainment at all times.

Bluetooth Support:

Connect wireless peripherals such as keyboards, mice, headphones, and game controllers with built-in Bluetooth support. Enhance your gaming and multimedia experience with effortless connectivity.

User-Friendly Interface:

Navigate through your favorite content effortlessly with our user-friendly interface. Easily switch between apps, customize settings, and discover new content with intuitive controls and organized menus.

Secure and Up-to-Date Software:

We prioritize security and software updates to ensure that your Android TV Box is always protected against vulnerabilities and equipped with the latest features and improvements. Enjoy peace of mind knowing that your device is secure and up-to-date.

Conclusion:

As your trusted Amlogic A311D [Android TV Box supplier](#), we are committed to delivering unmatched entertainment experiences with cutting-edge technology, seamless performance, and intuitive interfaces. Elevate your entertainment setup with our premium Android TV Box and immerse yourself in a world of endless possibilities.